STERLING PUMPS

6"

W17 2900 rpm

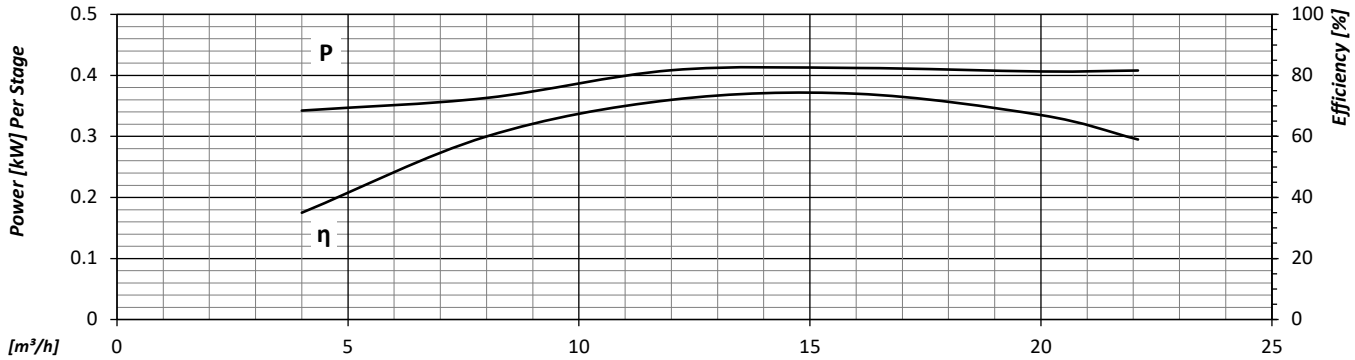

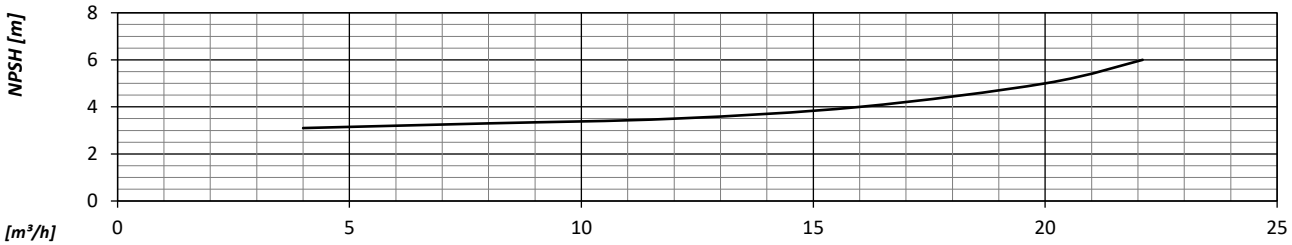

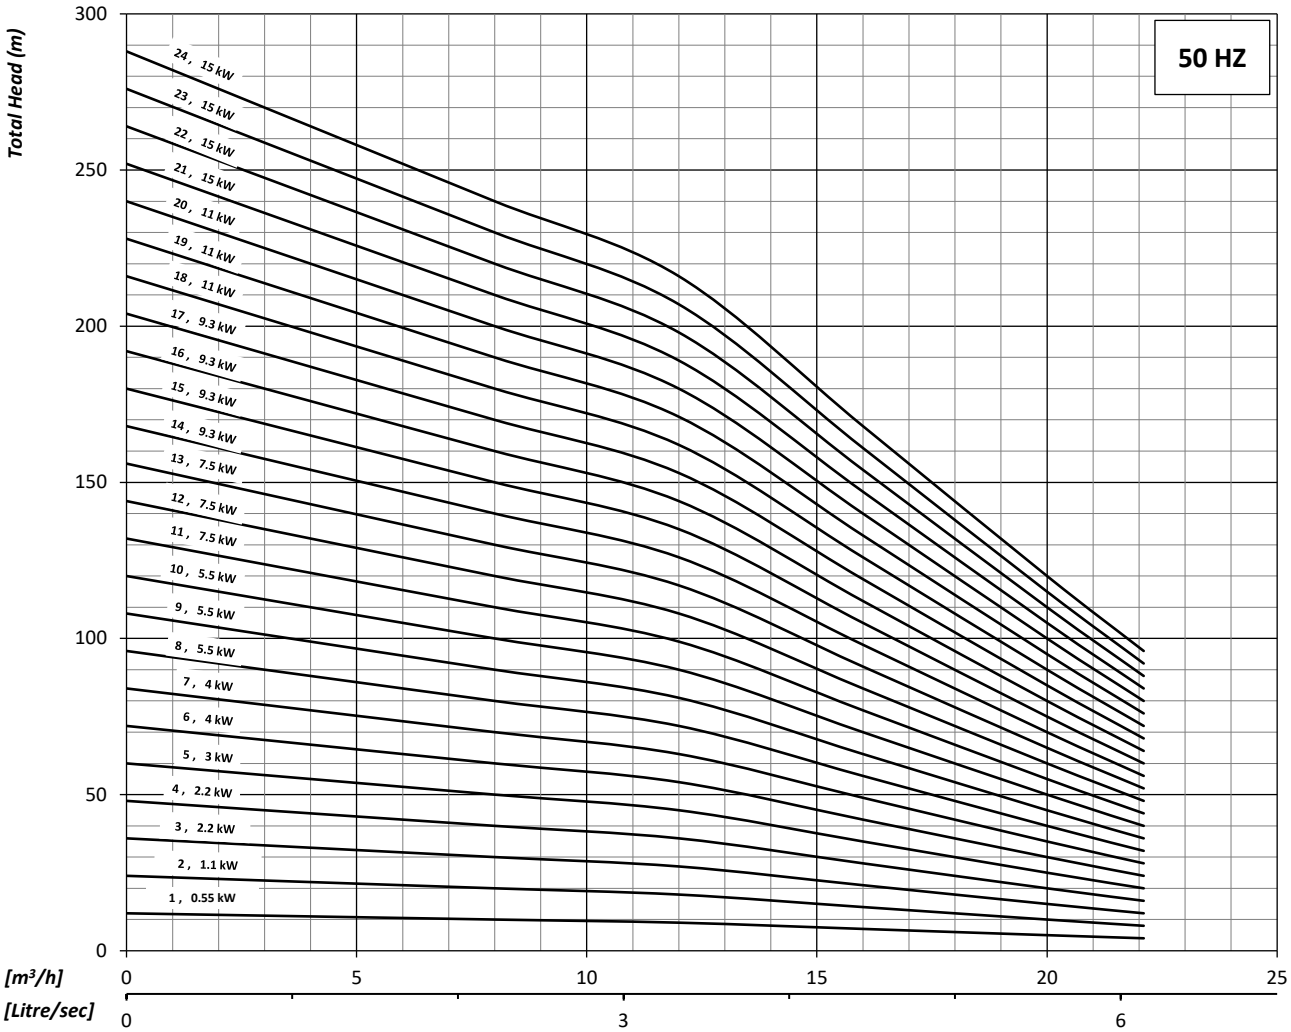

Performance curves are drafted based on pumping clean water (S.G. of 1.0 g/cm3) at temperature of 20 °C.
Pump performance comply to ISO 9906 gr. 3b.
Indicated efficiency values are valid for pumps in 3 stages or more.
Consult with factory for curves at different speeds

STERLING PUMPS

6"

W17 2900 rpm

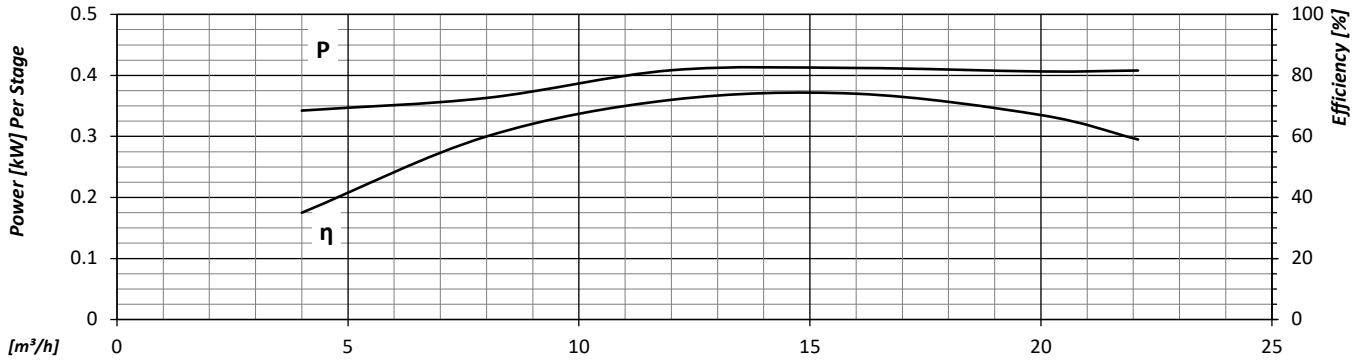

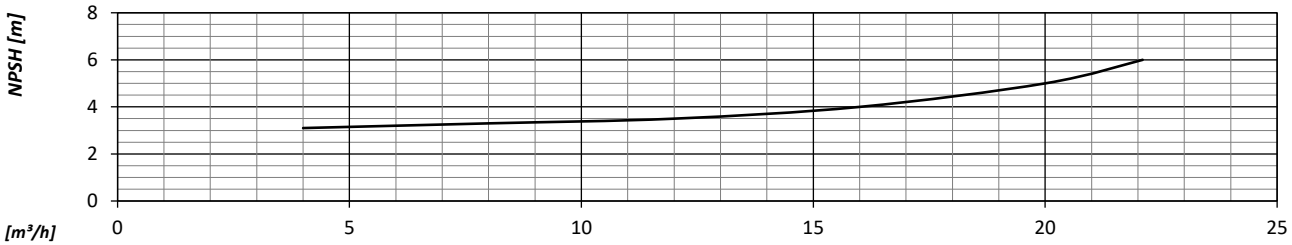

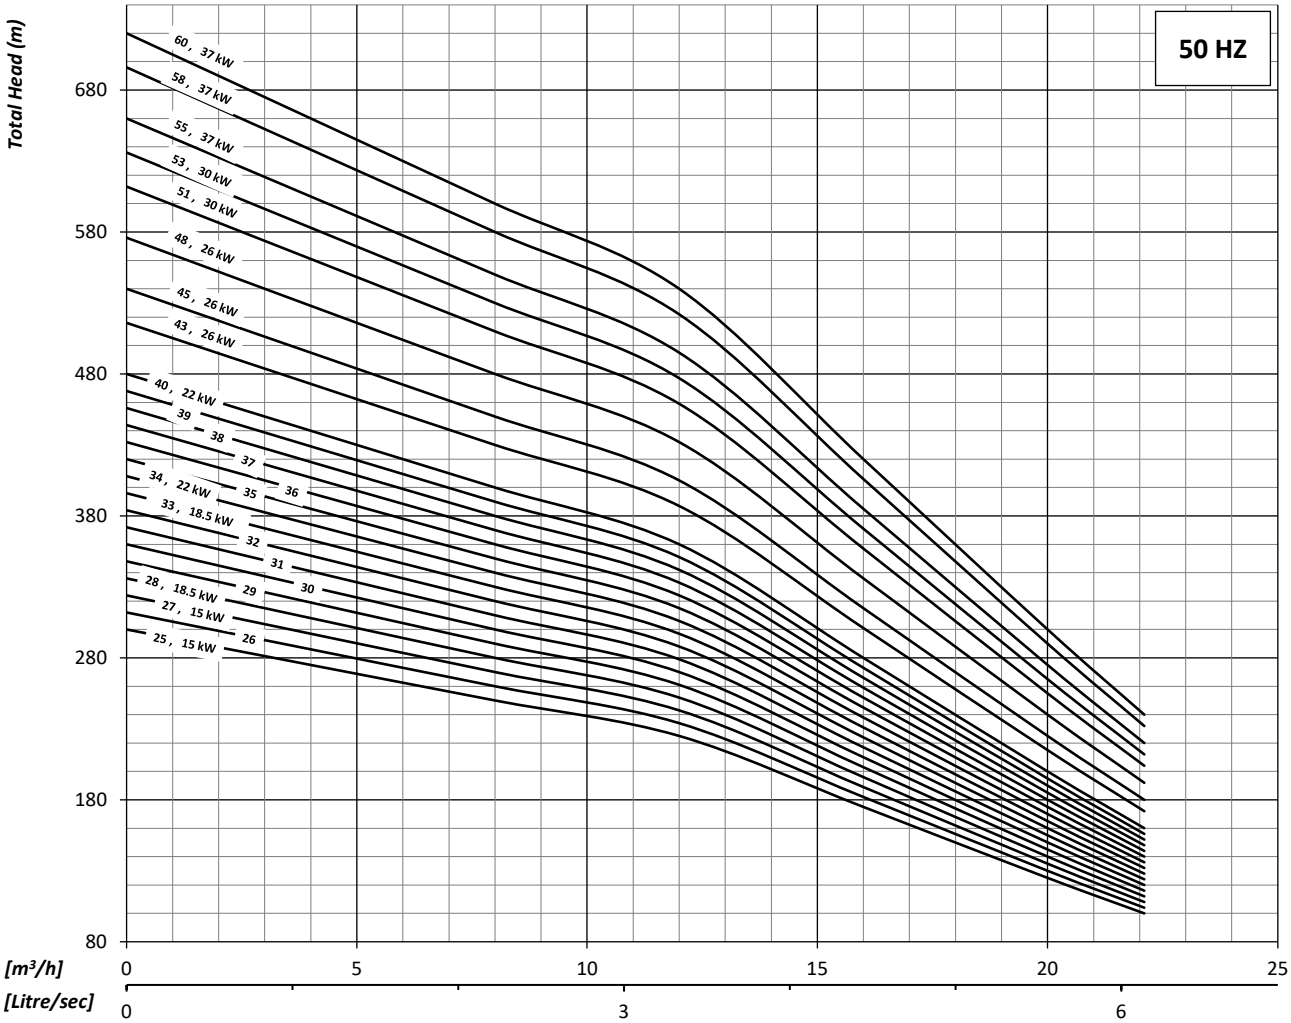

Performance curves are drafted based on pumping clean water (S.G. of 1.0 g/cm3) at temperature of 20 °C.
Pump performance comply to ISO 9906 gr. 3b.
Indicated efficiency values are valid for pumps in 3 stages or more.
Consult with factory for curves at different speeds

STERLING PUMPS

6"

W30 2900 rpm

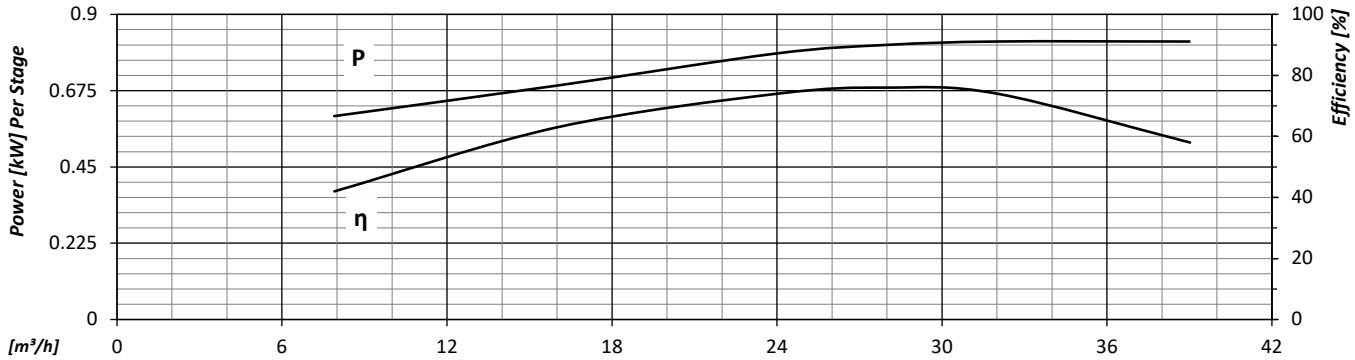

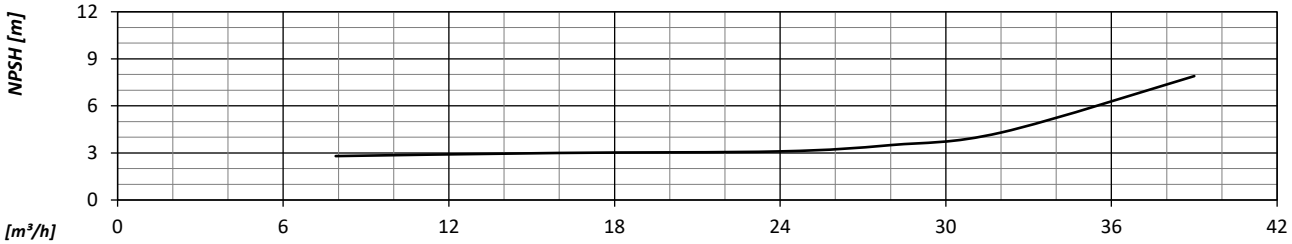

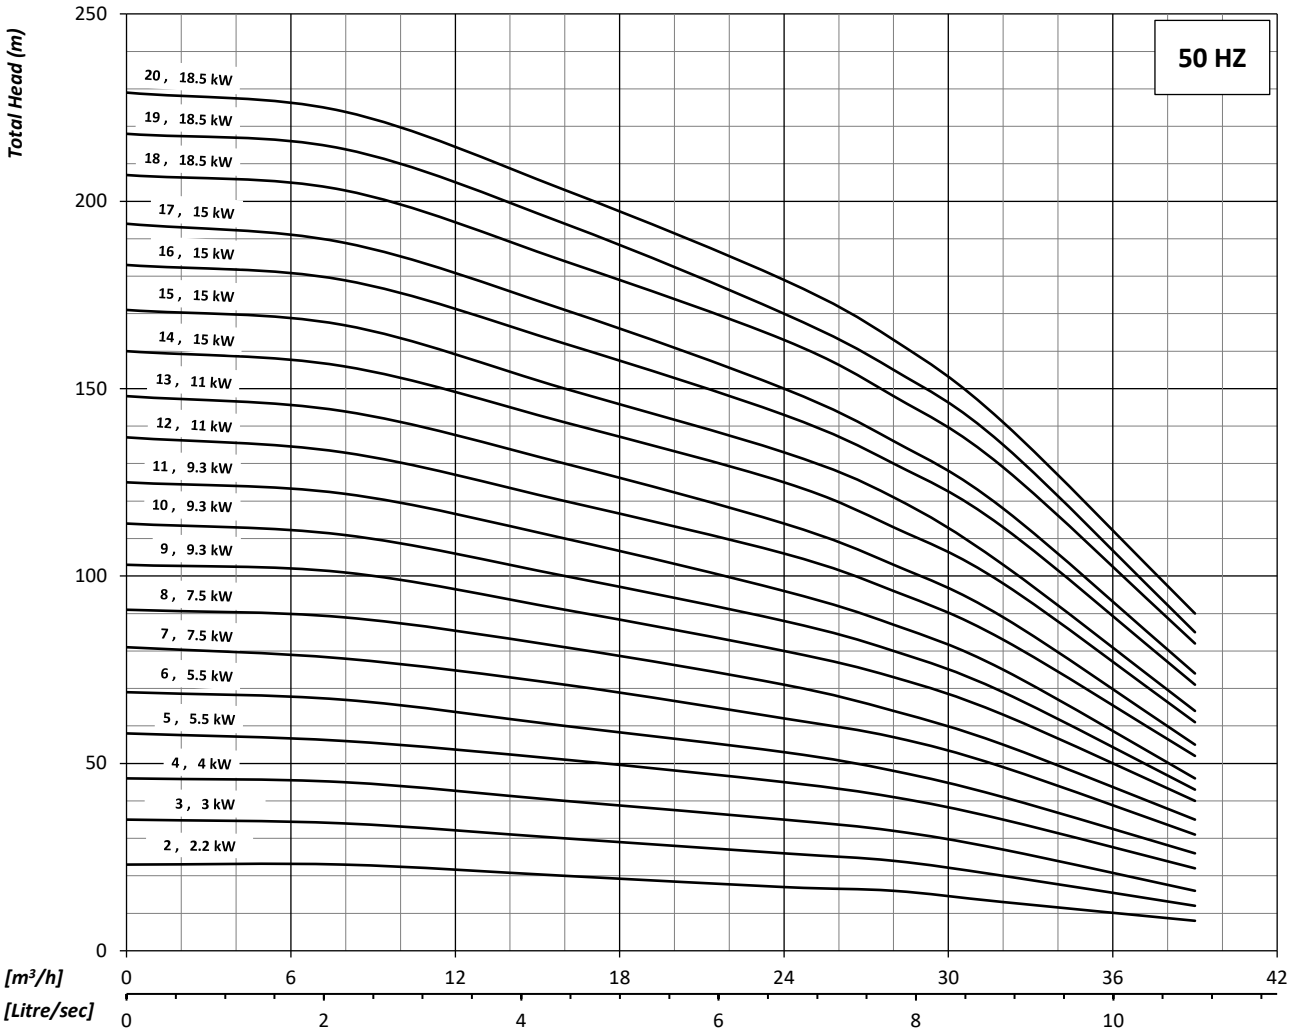

Performance curves are drafted based on pumping clean water (S.G. of 1.0 g/cm3) at temperature of 20 °C.
Pump performance comply to ISO 9906 gr. 3b.
Indicated efficiency values are valid for pumps in 3 stages or more.
Consult with factory for curves at different speeds

STERLING PUMPS

6"

W30 2900 rpm

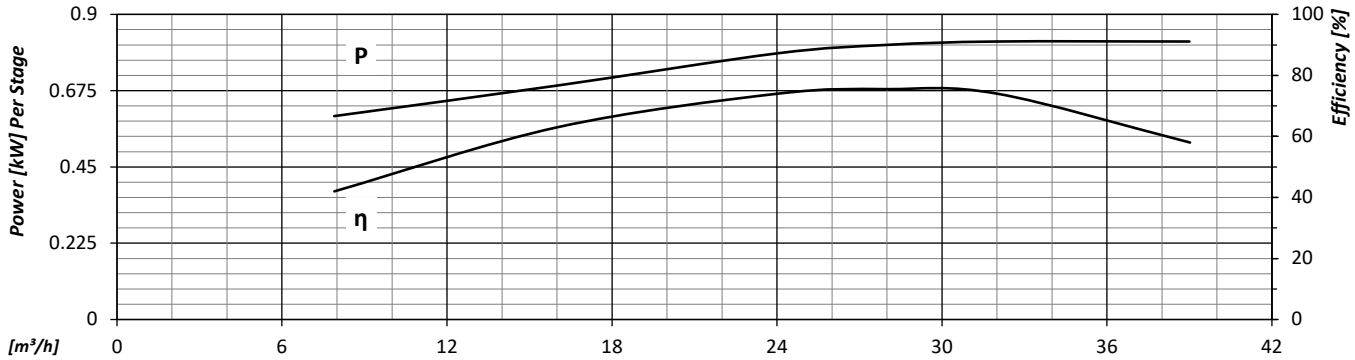

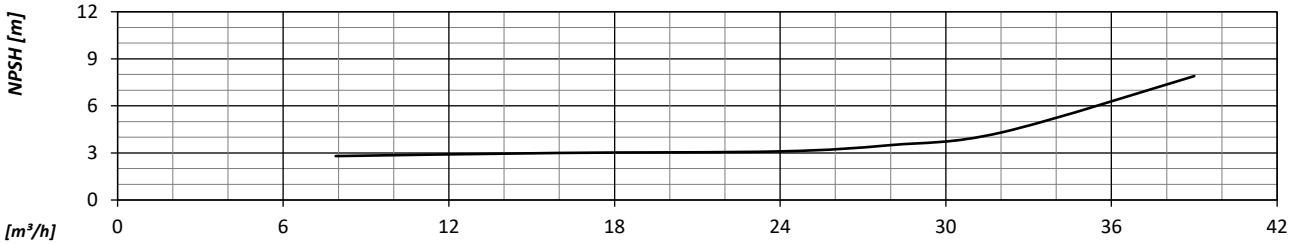

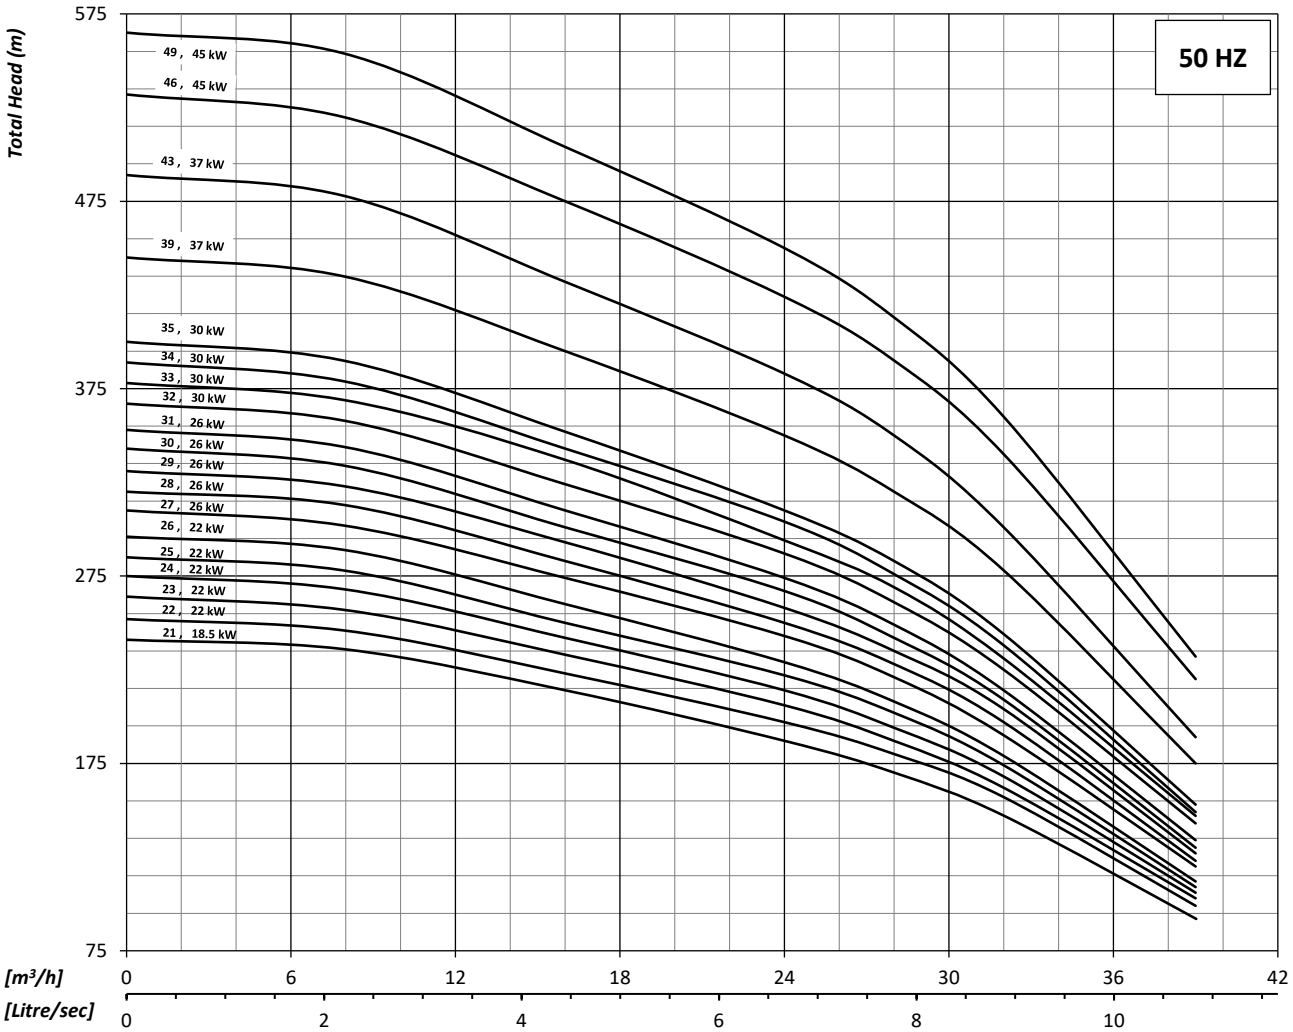

Performance curves are drafted based on pumping clean water (S.G. of 1.0 g/cm3) at temperature of 20 °C.
Pump performance comply to ISO 9906 gr. 3b.
Indicated efficiency values are valid for pumps in 3 stages or more.
Consult with factory for curves at different speeds

STERLING PUMPS

6"

W46 2900 rpm

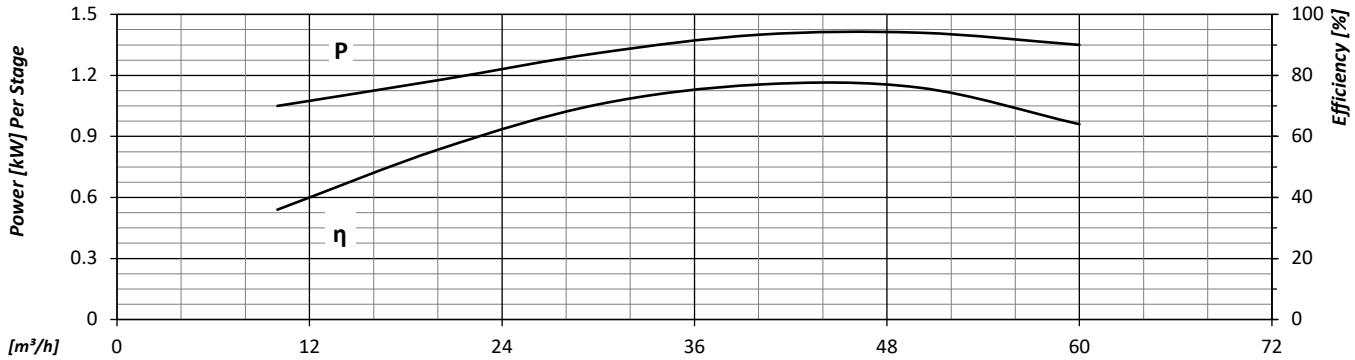

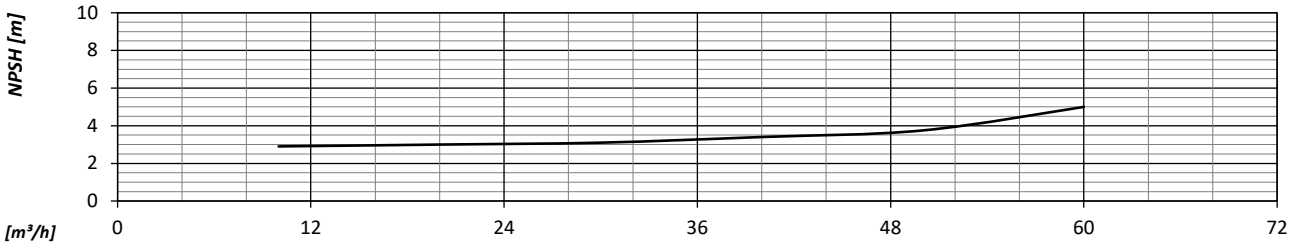

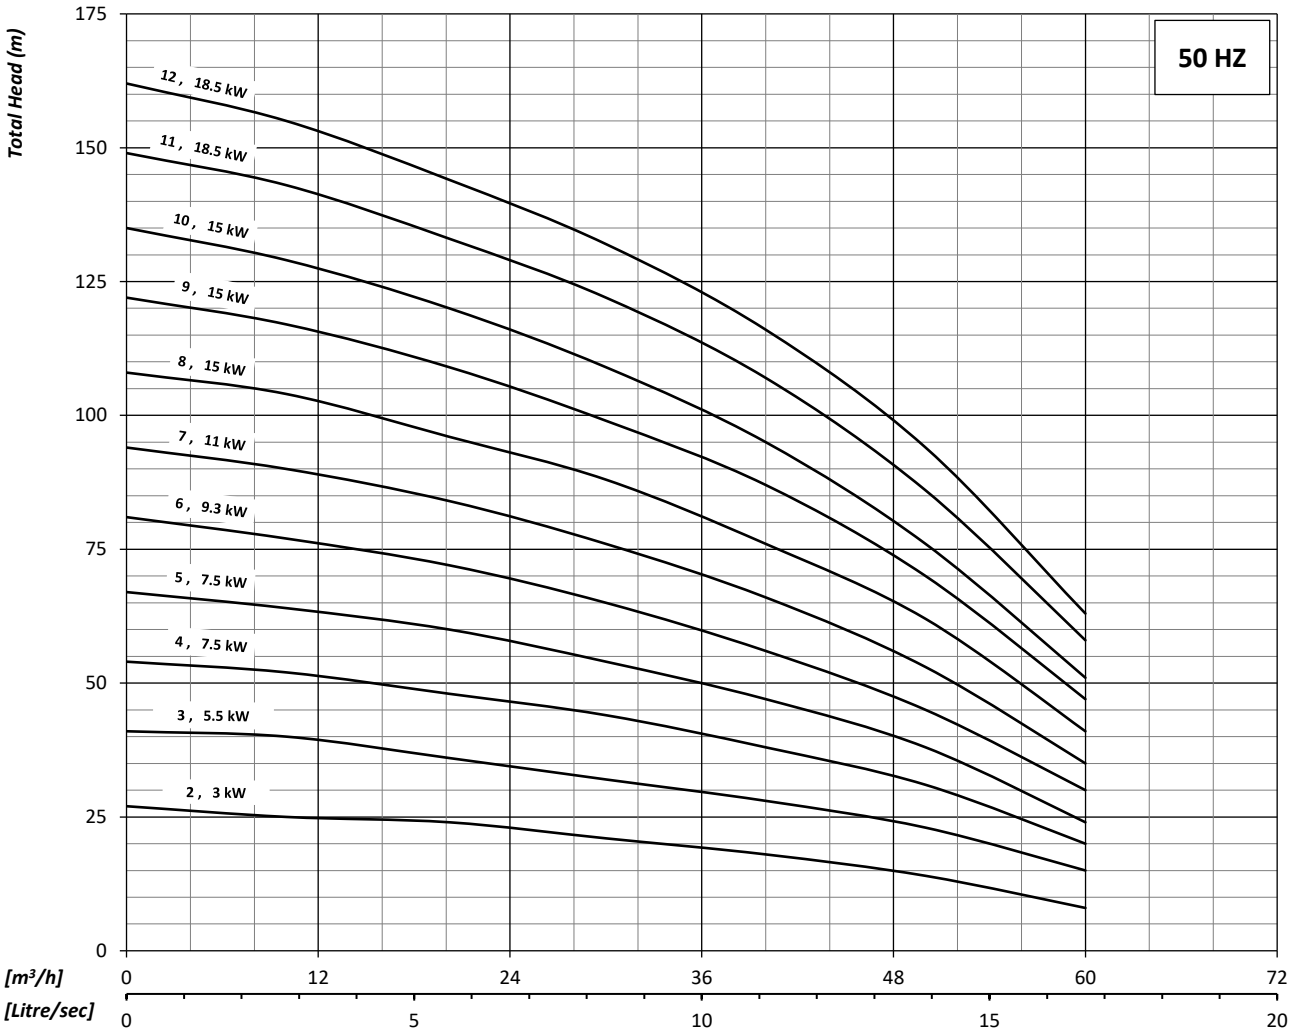

Performance curves are drafted based on pumping clean water (S.G. of 1.0 g/cm3) at temperature of 20 °C.
Pump performance comply to ISO 9906 gr. 3b.
Indicated efficiency values are valid for pumps in 3 stages or more.
Consult with factory for curves at different speeds

STERLING PUMPS

6"

W46 2900 rpm

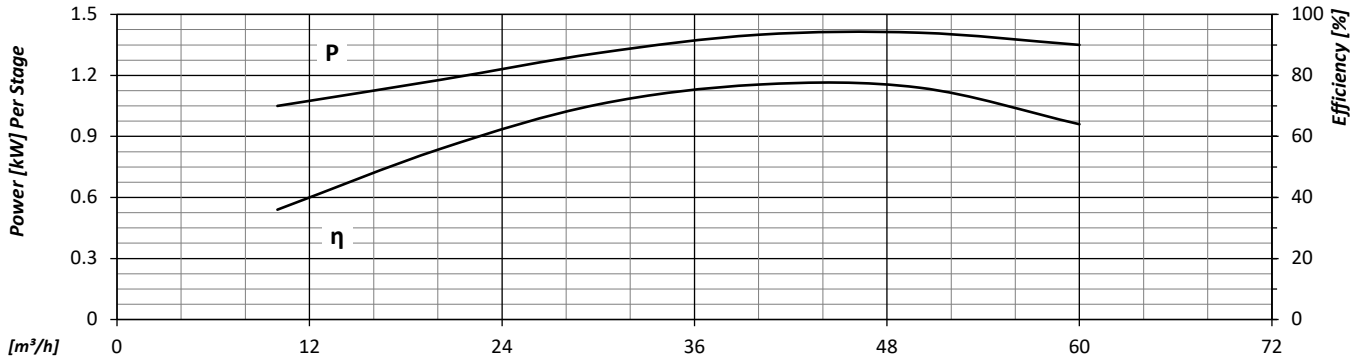

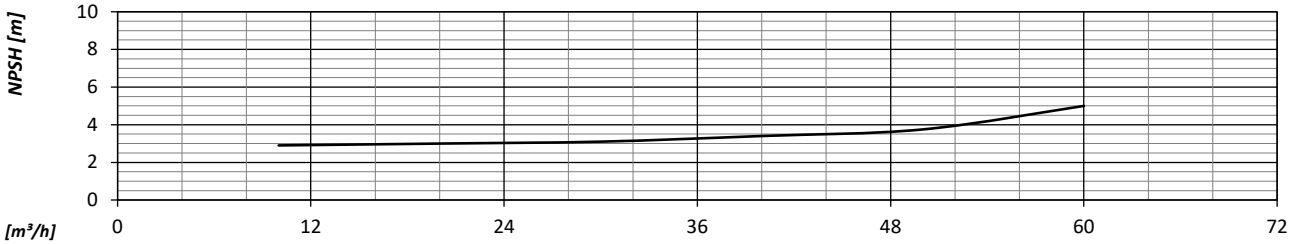

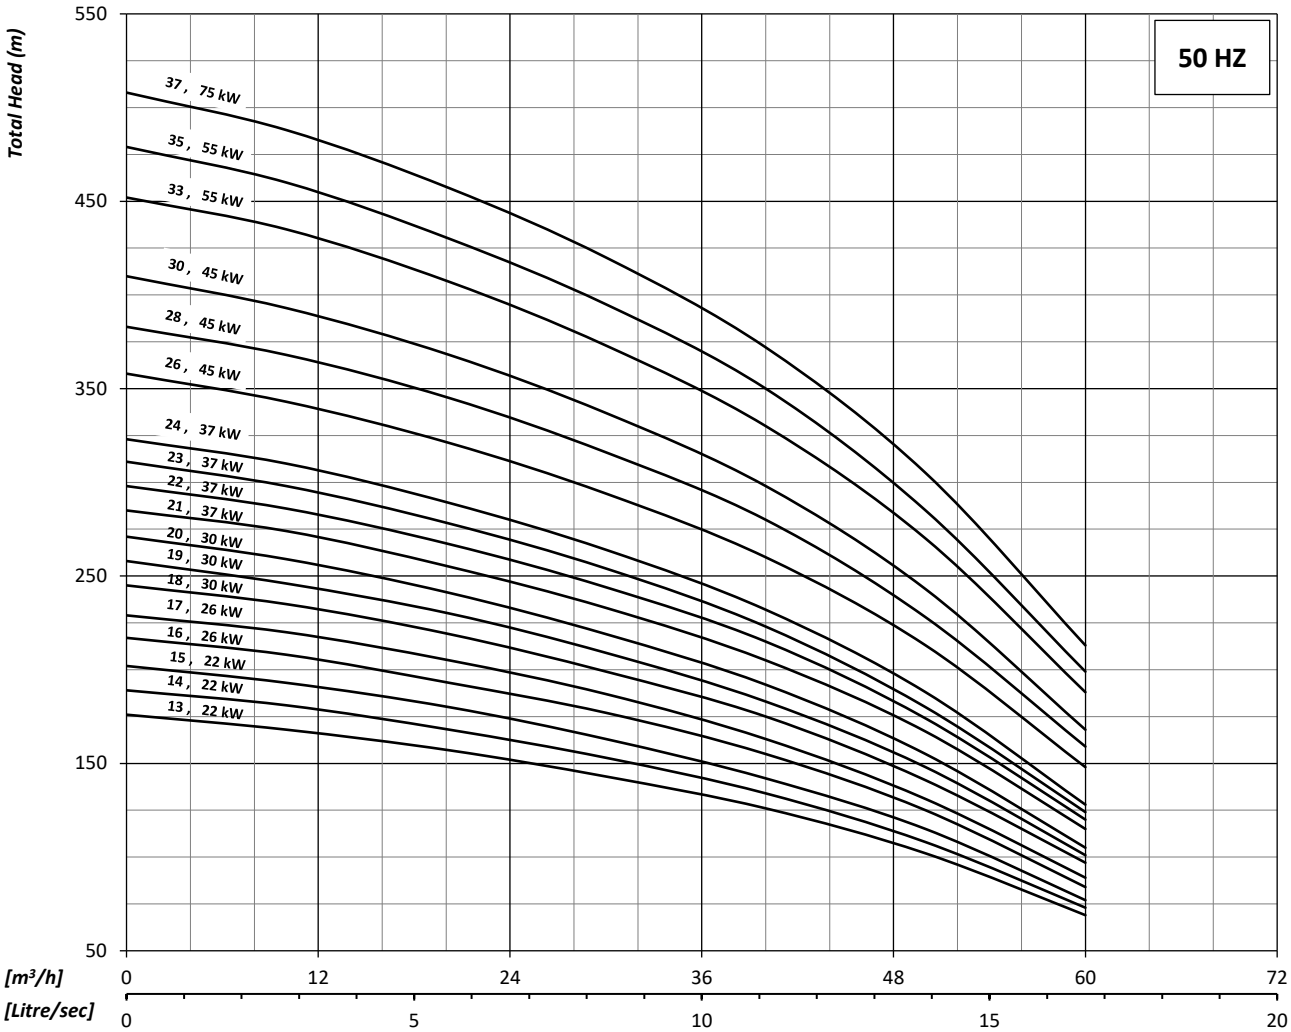

Performance curves are drafted based on pumping clean water (S.G. of 1.0 g/cm3) at temperature of 20 °C.
Pump performance comply to ISO 9906 gr. 3b.
Indicated efficiency values are valid for pumps in 3 stages or more.
Consult with factory for curves at different speeds

STERLING PUMPS

6"

W60 2900 rpm

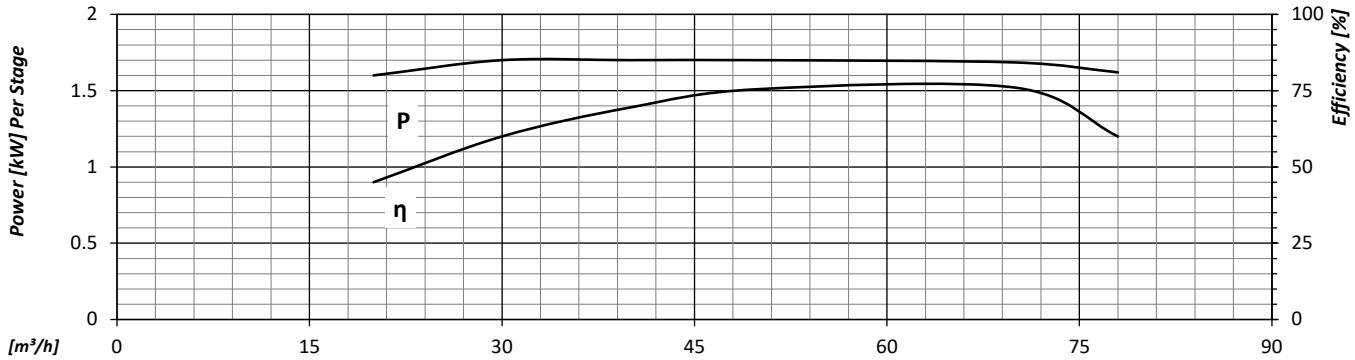

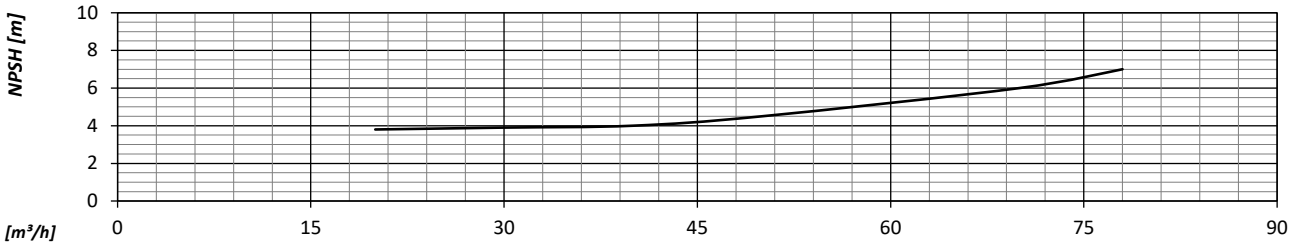

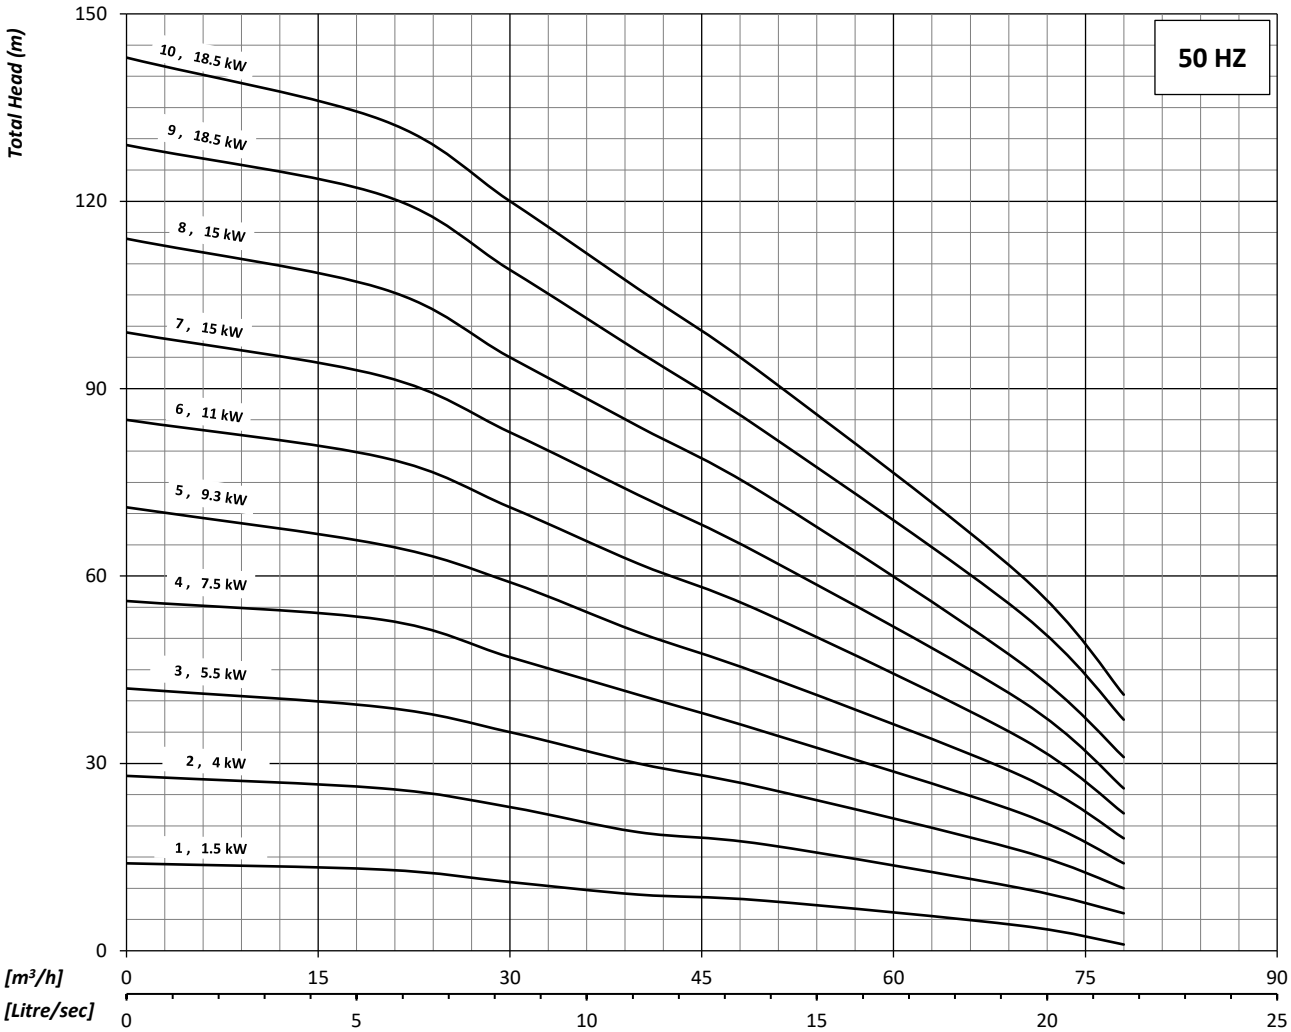

Performance curves are drafted based on pumping clean water (S.G. of 1.0 g/cm3) at temperature of 20 °C.
Pump performance comply to ISO 9906 gr. 3b.
Indicated efficiency values are valid for pumps in 3 stages or more.
Consult with factory for curves at different speeds

STERLING PUMPS

6"

W60 2900 rpm

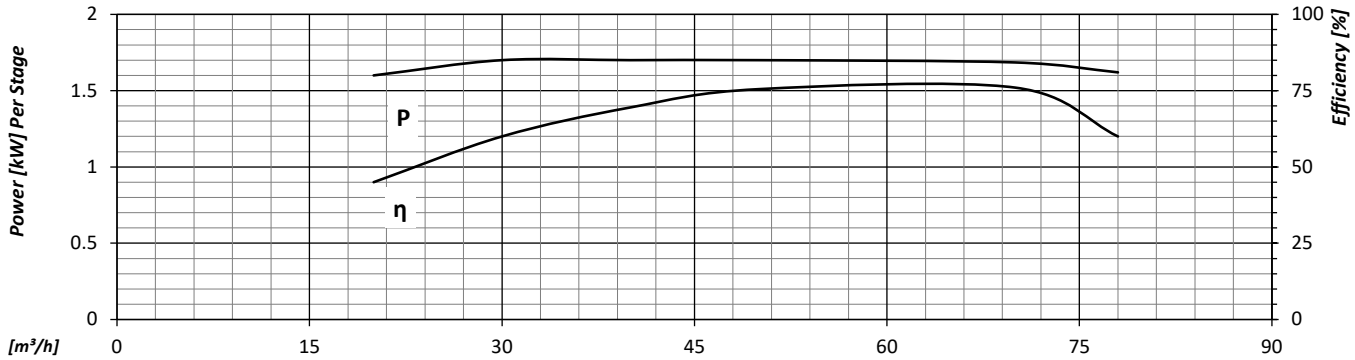

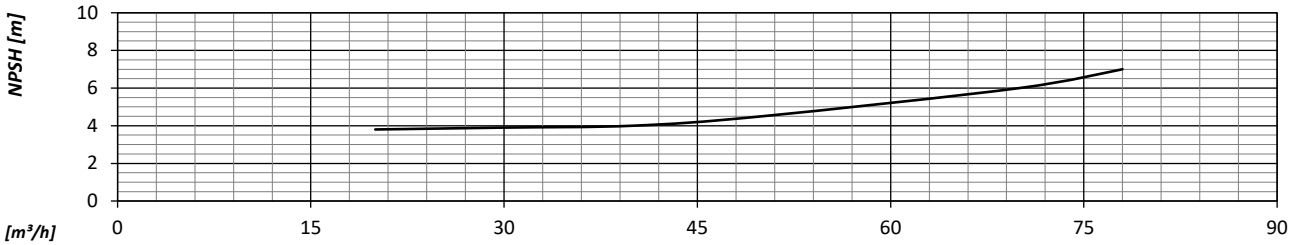

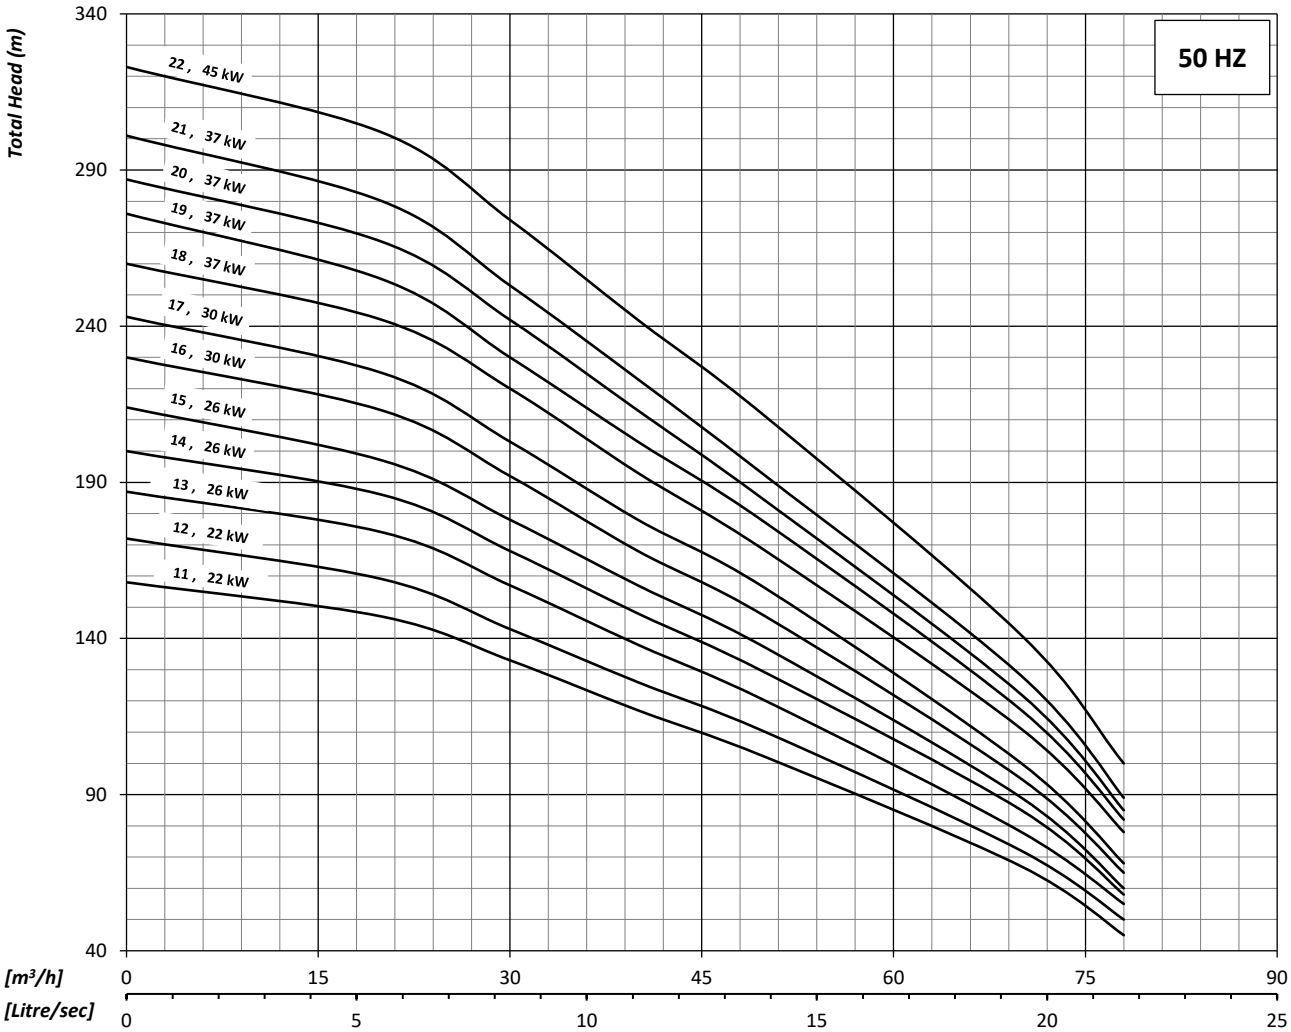

Performance curves are drafted based on pumping clean water (S.G. of 1.0 g/cm3) at temperature of 20 °C.
Pump performance comply to ISO 9906 gr. 3b.
Indicated efficiency values are valid for pumps in 3 stages or more.
Consult with factory for curves at different speeds